**Cabinet Range** 

eT.

## Core


















	e20	e30	e40	e50	e60	e100	e200	e300	e400	e600	e800	e1000
H (Inch)	27	31	37	43	49	74	74	74	74	74	74	74
W (Inch)	30	30	30	30	30	30	41	71	81	122	162	203
D (Inch)	6.5	6.5	6.5	6.5	6.5	6.5	7	7	7	7	7	7
W (lb)	86	90	115	132	150	210	267	421	479	690	902	1113

System Materials	1.5mm Mild Steel					
Color	RAL 7016, Anthracite Grey					
Door Options	Clear polycarbonate, dark transparent, solid steel					
eFOBs	RFiD					
LEDs	Multi-Color					
Operating Temperature (°F)	14 to max +140					
Power Supply (v)	110 - 120					
Max Power Consumption	2.5 Amps					
Battery Backup (8 Hours)	5.4 Ah Lead Acid					
System Access	PIN, RFiD, Fingerprint					
Interface	10" Touchscreen display					
Users Per System	10,000 Per Application					
Communications	Ethernet, WiFi, 4G					
Mounting	Wall Mounted					
Manual Override	Mechanical & Electronic					
Warranty	12 Months					
Standards	CE & FCC					



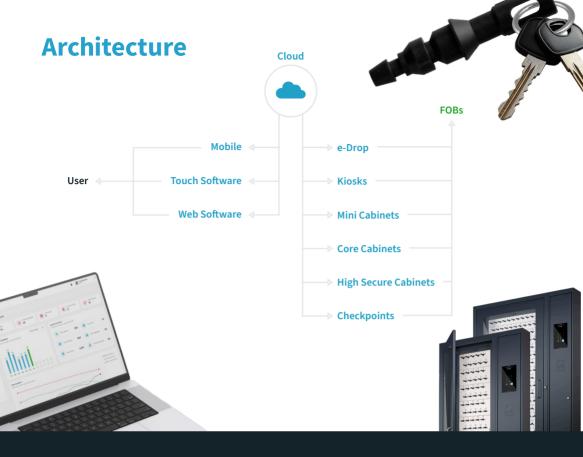

## **Features:**

- Magnetic Locks
- Multi-colour LEDs
- Off-set Key Positions
- Networked Cabinets
- Multi-site Management

- API & Webhooks
- 3rd Party Integrations
- Analytics
- Mobile Key Booking
- Easy to use Web Software

- User Group Access Levels
- Low Service & Maintenance
- 4G Connectivity
- Offline Mode
- Battery Backup

## **Benefits:**

- Complete Transparency
- · Increased Efficiency
- Improved Job Satisfaction
- Minimized Risks

- Full Compliance
- Organized Key Storage
- Enhanced Security
- Local Control

- Central Overview
- Reduced Admin Costs
- Minimal Training
- Proactive Monitoring